



Australian Government

Department of Foreign Affairs and Trade

PMSB-25007-C71

REQUEST FOR TENDER (RFT)

PART 2 – SCOPE OF REQUIREMENTS

**FOR THE PROVISION OF HEAD WORKS CONTACTOR FOR THE REFURBISHMENT OF
THE AUSTRALIAN HIGH COMMISSION STAFF RESIDENTIAL COMPOUND
KONEDOBU, PORT MORESBY, PAPUA NEW GUINEA**

The timetable below provides the key dates related to this RFT.

AusTender Publish Date	26 June 2026
Closing Time	13 August 2026 at 1700hrs Canberra Local Time
Deadline for Tenderer Registration to attend Industry Briefing and Site Visit	6 July 2026 at 1700hrs Canberra Local Time
Industry Briefing	7 July 2026 at 1300hrs Canberra Local Time (online via Microsoft Teams)
Site Visit	15 July 2026 Time to be Confirmed- as per clause 2.2.1(b)
Deadline for Questions	6 August 2026 at 1700hrs Canberra Local Time
Contact Email	aopoprojects@dfat.gov.au

CONTENTS

PART 2.	SCOPE OF REQUIREMENTS	2
1.	Scope of Requirements	2
1.1.	Project Overview	2
1.2.	Project Scope	2
1.3.	Project Stakeholder	4
1.4.	Proposed Project Stages and Phases	4
1.5.	Proposed indicative Program	7
1.6.	Design and Construct (D&C) Contractors Roles and Responsibilities:	9
1.7.	Material and Product Selection	11
1.8.	Prevention of Mould and Mildew:	11
1.9.	Engagement and Communication	12
1.10.	Project Structure	13
1.11.	Due Diligence Services	13
1.12.	Construction Services	14
1.13.	Works-As-Executed or As-Built Drawings:	21
1.14.	Handover - Operation and Maintenance Manuals (O&M Manuals):	22
1.15.	Defects Liability Period:	25
1.16.	Qualifications, Credentials and Accreditation:	25
1.17.	Privacy and Confidentiality:	25
1.18.	Required Standards of Performance	26
1.19.	Regulatory Requirements	26
1.20.	Conditions Applying to the Delivery of the Services	26
1.21.	Security Requirements	27

PART 2. SCOPE OF REQUIREMENTS

1. Scope of Requirements

1.1. Project Overview

- 1.1.1. The Australian High Commission (AHC) Staff Residential Compound (SRC) Konedobu, is located approximately 3 kilometres (km) north of Port Moresby's CBD in an elevated area. Built in 1993, it comprises 45 residences in a mix of townhouses, duplexes, and apartments with three- and four-bedroom layouts. Townhouses are two storeys, and apartment buildings across many levels, connected by external stairs to suit the site's topography. Construction uses concrete blockwork, concrete, and timber framing. The SRC spans 11,315 square metres (m²) of built area within 31,000m² of landscaped grounds and includes communal amenities, recreation areas, security features, open spaces, playgrounds, and essential services such as potable water tanks and backup generators.
- 1.1.2. The compound was built as a family residence compound and provides accommodation for staff employed by Commonwealth agencies including DFAT in Port Moresby.
- 1.1.3. Whilst the residences have been maintained, albeit consistent with the 1990's date of construction, the object of the Project is to upgrade and modernise all the properties to bring them up to a fit-for-purpose condition. A staged refurbishment delivery program will be established to minimise disruption to occupants and assist with completing works in the minimum possible time.
- 1.1.4. The intent of the refurbishment is to use durable, climate-appropriate materials that can be sourced and maintained locally or within the region. The design standardises layouts and finishes, improves maintainability, and applies a repeatable "kit-of-parts" approach to enable interchangeable components and efficient repairs.
- 1.1.5. The works will be carried as a staged rolling program. A Pilot Project was undertaken as a due diligence exercise and provided lessons learnt that have been incorporated into the refurbishment of the remaining 39 residences (this Project). The remainder of the works will be staged over future years.

1.2. Project Scope

- 1.2.1. The general refurbishment scope for each residence includes:
 - a. The current design, building layout and arrangement while generally fixed, the contractor should undertake an exercise of due diligence/verification of the design against each dwelling. Ensuring any differences or are identified including existing fixtures and services. This includes kitchen and bathroom layouts and product specifications that will improve overall durability and longevity of the design. Design is not bespoke but is a kit of parts (modules) that are repeatable in each residence.
 - b. Demolition of internal surfaces and fittings as required. Over the past 30 years, various works have been undertaken to each residence which are inconsistent due what could be sourced within country and the available workforce. Each house has varying floor and wall finishes, light fittings, split systems and power outlets, etc.

- c. While the properties will be handed over vacant, several elements will be required to be salvaged from the demolition. For example, ceiling fans, lights, connected appliances, AC units, pelmets, curtains, fire hydrants, safes. etc. Items to be salvaged and will be confirmed by DFAT for the dilapidation report.
- d. Demolition of internal surfaces, including flooring, fittings and redundant services.
- e. Removal and treatment of mouldy plasterboard walls and ceilings
- f. New wall linings, and insulation to ceilings and selected walls
- g. Supply and install new kitchens and appliances, relocate services to suit new layout and appliances.
- h. Supply and install new robes, walk in robes, while working around existing security hardware
- i. Refurbishment of wet areas (bathrooms, powder rooms, and laundries), including preparation of floors and walls, waterproofing, relocate services as required, supply and fit new tiles and fitments.
- j. Preparation of floor for new tiles throughout, noting that each residence has inconsistent floor levels (potentially to each room). Where inconsistent floor levels are present additional floor treatment/ leveling will be required to standardise design and layouts and eliminate trip hazards.
- k. Replace ceiling fans and replacement of existing air-conditioning with new energy-efficient refrigerated air conditioning systems and new bathroom and laundry and kitchen exhaust fans.
- l. Replace/add light fittings and switch plates, electrical outlets, all existing power and switch cover plates for a consistent installation.
- m. Replace/ upgrade distribution boards. This also includes electrical re-wiring if there are any non-compliance discovered with the existing installation. Inclusion of surge protection to be incorporate into switch boards.
- n. Replace solar hot water system
- o. Replace/ upgrade fire services configuration to meet code compliance. Including replacement of fire hydrants and blankets.
- p. Upgrade phone and data cable connection points, and install a conduit for future capability upgrade from roof to living room.
- q. New stair handrails and balustrades, and refurbish the existing stair treads, providing an additional fall protection to the safe haven gate.
- r. New paint throughout.
- s. Rectification of any damage to the external painted brick façade as a result of the works.
- t. New double glazing and security screens to window openings, curtains and window furniture.

1.3. Project Stakeholder


1.3.1. Key stakeholder groups associated with the Project and the Works include:

- a. Project Sponsor: DFAT – Overseas Property Office (OPO) – representing the Commonwealth of Australia.
- b. DFAT Project Manager: DFAT
- c. Superintendent - Project Manager/ Contract Administrator: TBC
- d. Onsite Project Manager/Site Manager: TBC
- e. User Groups: The High Commission and Residents
- f. Property Facilities Manager: current provider is Jones Lang LaSalle (JLL)
- g. DFAT Consultants: Architects, Engineers and Cost Planners
- h. Local Authorities

1.4. Proposed Project Stages and Phases

1.4.1. Due to the requirement to continue to house residents on the site, it is proposed that between 4-6 dwellings are refurbished at any one time to enable a rolling staged program of works across 7 remaining stages. This approach minimises disruption to residents and significantly reduces the need for additional leased housing in the constrained rental market in Port Moresby. The indicative staging plan below is subject to change to respond to operational requirements or successful tenderer identified efficiencies in planning and delivery. As the project progresses the staging plan may be reviewed and amended to meet operational needs.

Figure 1 Indicative staging plan

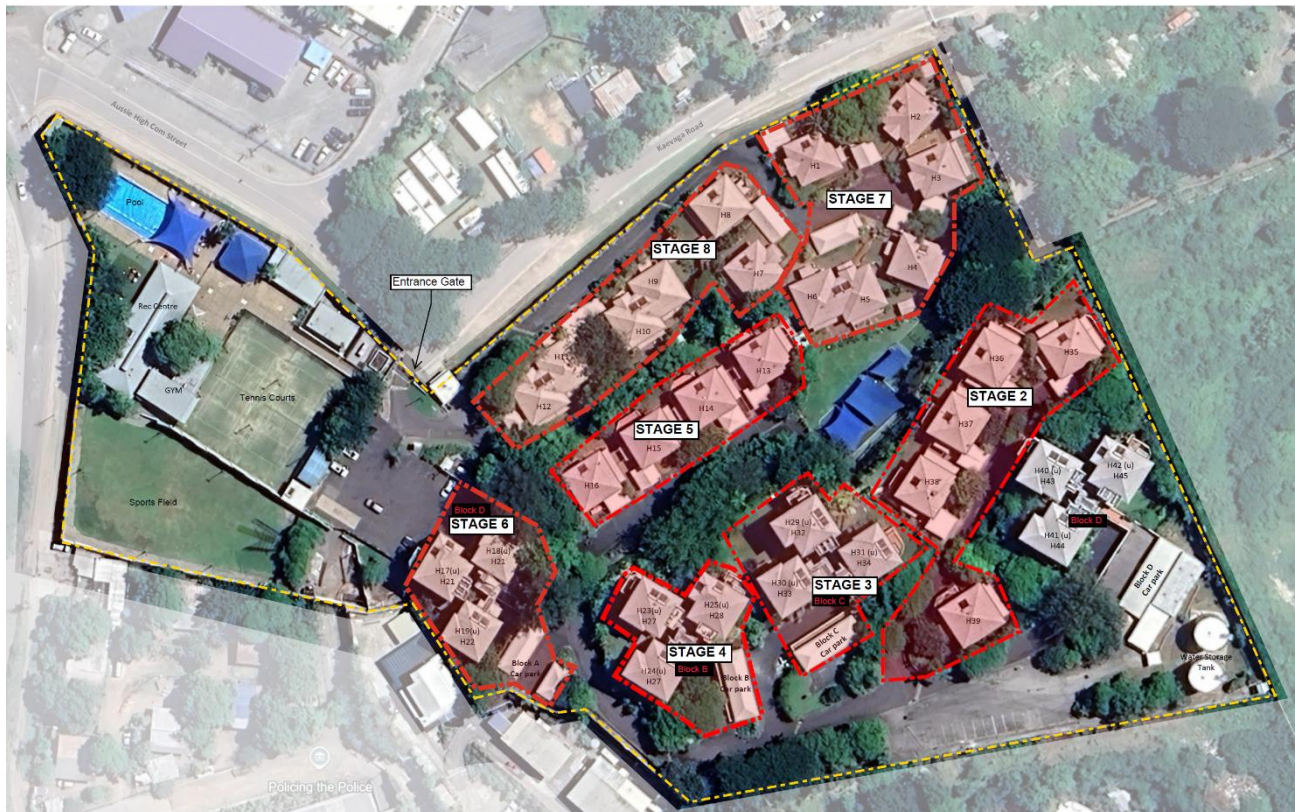

- 1.4.2. List of dwellings in each stage (stages are not in any particular order and may not be delivered in numerical order as listed below.

Stage name	House No.	Street	Accommodation Type	Number of Bedrooms
Stage 2	35	6th Street	Stand-alone townhouse	3
	36	6th Street	Stand-alone townhouse	4
	37	6th Street	Stand-alone townhouse	4
	38	6th Street	Stand-alone townhouse	4
	39	Access	Stand-alone townhouse	4
Stage 3	29	4th Street	Apartment	4
	30	4th Street	Apartment	3
	31	4th Street	Apartment	3
	32	5th Street	Apartment	4
	33	5th Street	Apartment	3
	34	5th Street	Apartment	3
Stage 4	23	3rd Street	Apartment	3
	24	3rd Street	Apartment	4
	25	4th Street	Apartment	4
	26	4th Street	Apartment	3
	27	4th Street	Apartment	4
	28	4th Street	Apartment	4
Stage 5	13	2nd Street	Stand-alone townhouse	3
	14	2nd Street	Stand-alone townhouse	4
	15	2nd Street	Stand-alone townhouse	4
	16	2nd Street	Stand-alone townhouse	3
Stage 6	17	2nd Street	Apartment	4
	18	2nd Street	Apartment	3
	19	2nd Street	Apartment	3
	20	2nd Street	Apartment	4
	21	2nd Street	Apartment	3
	22	2nd Street	Apartment	3
Stage 7	1	1st Street	Stand-alone townhouse	4
	2	1st Street	Stand-alone townhouse	4
	3	1st Street	Stand-alone townhouse	4
	4	1st Street	Stand-alone townhouse	4
	5	1st Street	Duplex	4
	6	1st Street	Duplex	4
Stage 8	7	1st Street	Stand-alone townhouse	4
	8	1st Street	Stand-alone townhouse	4
	9	1st Street	Duplex	4
	10	1st Street	Duplex	4
	11	1st Street	Duplex	4
	12	1st Street	Duplex	4

- 1.4.3. The below table offers a proposed approach to phasing for the delivery of Works; it is at the Tenderer's sole discretion to adhere to the below phases for each of the stages:

Phase	Activity	Additional Activities
1	Design Due diligence Phase & Latent Condition Identification	• Due Diligence, Dilapidation/ Latent Condition report. • Design Workshop (architect, contractor, PMCA, DFAT) • Work with the client consultants to bring the design up to 'For Construction' documentation • DFAT Approval • Reissue • Commence Workshop Drawings (Falls and Tile layouts, Joinery etc)
2	Early Works	Procurement of long lead items from Australia or other approved locations.
3	Site Establishment	Prepare and issue all site plans: • Project Safety Plan • Risk Assessments • SWMS (Safe Work Method Statement) • Quality Plan • Site Management Plan • Waste Management • Traffic Management • Staging Plan • Security Plans
4	Demolition	Demolition commences concurrently whilst the design is being finalised.
6	Construction	• Procurement of materials, storage and logistics • Internal fit-out works
7	Testing and Commissioning	Submit Testing and Commissioning Plans
8	Operating and Maintenance Manuals (O&Ms) and As-Built	• Submission of the draft format for review in accordance with the contract • Collate all documentation
9	Practical Completion including Defect Rectification	Management of clearing defects De-mobilisation
10	Handover Completion & Occupation by Post	
11	Defects Notification period and Maintenance	The HWC is to provide a 12-month preventative and schedule maintenance to support the project
12	Possession of next stage site once residents have been moved into completed stage	

1.5. Proposed indicative Program

1.5.1. The Contractor is to attach a detailed program of work for the project. The program is to be detailed enough so daily progress can be monitored.

1.5.2. The program shall be in a bar chart presentation form with all logic links and clearly indicating the critical path. It is anticipated that this program will demonstrate that the Tenderer has an understanding of the constraints on construction, lead times and procurement activities.

Note that that the program should reflect PNG AHC observed holidays, PNG Public Holidays ([Contact us](#)) and site shutdowns including indicatively,

- New Year's Day
- National Remembrance Day of the Late Grand Chief Rt. Hon. Sir Michael Thomas Somare
- Good Friday
- Easter Monday
- ANZAC Day
- King's Birthday
- National Remembrance Day
- Repentance Day 26 August 2026
- Independence Day
- Labour Day
- Christmas Day
- Konedobu site shutdown between approx. 20th December and 2nd January.

1.5.3. Consideration will be given to options that the tenderer may be able to propose which will reduce the overall construction program.

1.5.4. The program is to reflect the following milestone indicative dates:

Item	Milestone Date
Anticipated Tender Closes	13 Aug 2026
Anticipated Parliamentary Works Approval	26 Jun 2026
Anticipated Contract Award	18 Sept 2026
STAGE 2	
Mobilisation	21 Sept 2026
Dilapidation Report, Site Establishment, Contractor Due diligence	21 Sept 2026- 3 Nov 2026
Demolition and construction/refurbishment works	6 Nov 2026- 2 Apr 2027
Practical Completion	2 Apr 2027
Defects Liability Period begins	2 Apr 2027
Post relocation	5 Apr 2027- 30 Apr 2027
Defect Liability Period Ends	3 Apr 2028
STAGE 3	
Contractor due diligence/ Dilapidation Report	3 May 2027- 28 May 2027
Demolition and construction/refurbishment works	2 Jun 2027- 15 Oct 2027

Item	Milestone Date
Practical Completion	15 Oct 2027
Defects Liability Period begins	15 Oct 2027
Post relocation	18 Oct 2027- 12 Nov 2027
Defect Liability Period Ends	18 Oct 2028
STAGE 4	
Contractor Design due diligence/ Dilapidation Report	15 Nov 2027- 3 Dec 2027
Demolition and construction/refurbishment works	6 Dec 2027- 28 April 2028
Practical Completion	28 Apr 2028
Defects Liability Period begins	28 Apr 2028
Post relocation	1 May 2028- 26 May 2028
Defect Liability Period Ends	27 Apr 2029
STAGE 5	
Contractor Design Due diligence/ Dilapidation Report	29 May 2028- 16 Jun 2028
Demolition and construction/refurbishment works	22 Jun 2028 – 27 Oct 2028
Practical Completion	27 Oct 2028
Defects Liability Period begins	27 Oct 2028
Post relocation	30 Oct 2028 – 24 Nov 2028
Defect Liability Period Ends	30 Oct 2029
STAGE 6	
Contractor Design Due diligence/ Dilapidation Report	27 Nov 2028 – 15 Dec 2028
Demolition and construction/refurbishment works	03 Jan 2029 – 11 May 2029
Practical Completion	11 May 2029
Defects Liability Period begins	11 May 2029
Post relocation	14 May 2029 – 8 Jun 2029
Defect Liability Period Ends	11 May 2030
STAGE 7	
Contractor Design Due diligence/ Dilapidation Report	11 Jun 2029 – 29 Jun 2029
Demolition and construction/refurbishment works	4 Jul 2029 – 9 Nov 2029
Practical Completion	9 Nov 2029
Defects Liability Period begins	9 Nov 2029
Post relocation	12 Nov 2029 – 7 Dec 2029
Defect Liability Period Ends	9 Nov 2030
STAGE 8	
Contractor Design Due diligence/ Dilapidation Report	10 Dec 2029 – 11 Jan 2030

Item	Milestone Date
Demolition and construction/refurbishment works	16 Jan 2029 – 17 May 2030
Practical Completion	17 May 2030
Defects Liability Period begins	17 May 2030
Post relocation	20 May 2030 -14 Jun 2030
Defect Liability Period Ends	20 May 2031
Project Completion	20 May 2031

1.6. Design and Construct (D&C) Contractors Roles and Responsibilities:

1.6.1. Responsibilities:

- a. The Tenderer is to allow for the inclusion of all design elements, to ensure completeness and functionality of design.
- b. DFAT has provided designs to 90% and appropriate supporting documentation. The successful Tenderer will need to undertake a due diligence exercise to confirm the accuracy of the drawings, coordinating their own design consultants to bring the drawings up to 100% detailed design for DFAT's approval before progressing through to construction. DFAT's Architects and Engineers will Peer Review all design amendments. This also provides an opportunity for the Tenderer to propose alternative solutions (i.e. materials, details, etc.) that can increase efficiency and constructability.
- c. The Contractor will be responsible for all aspects of the project delivery for each residence, including:
 - i. Submission of documentation as required for building permits, local authority approvals, completion certificates and certificates of occupancy (if required).
 - ii. In country building contractors/ subcontractors.
 - iii. Suitably qualified services trades - plumbing, electrician, and mechanical.
 - iv. Other specialised trades as required for internal fit-out works.
 - v. Others sub-contractors as considered necessary by the Tenderer to ensure the requirements of this Contract can be achieved.
 - vi. Maintaining a Project Program of works.
 - vii. A fulltime Construction Project Manager/ Site Supervisor with appropriate supporting staff to direct and instruct trades and oversee all works during the delivery phase as well as.
 - viii. Reporting obligations under the contract and as reasonably requested by the PMCA.
 - ix. If local trades are used, they need task direction and supervision.
- d. Shall form and manage a self-motivated experienced team that will drive the due diligence process and delivery of the Project. The Contractor is responsible for all

aspects of project management and delivery to provide a turnkey solution for each residence.

- e. Is responsible for due diligence, stakeholder engagement (including residences if required), logistic, local authority engagement and building approval(s), procurement of trades and materials, construction, testing and commissioning, certification and handover takeover activities. DFAT has engaged a design and engineering team to assist with the review and oversight of the Contractor's activities.

1.6.2. **Deliverables: The Contractor:**

- a. Is to undertake due diligence at all residences (internal and external) and produce a report detailing findings, (dilapidation report). Upon acceptance of the report by DFAT and reengagement has occurred; the Tenderer is to work with their design and engineering consultants to address any discrepancies. The Tenderer should include allowance in the Program for obtaining approvals (if required) and importing materials with lead time items.
- b. Is responsible to undertake design input to uplift the drawings to 100% and Issued For Construction (IFC) drawings as part of the due diligence process.
- c. Shall continually monitor and identify problems, assess risk, and assist to facilitate early and cost-effective resolution to achieve delivery of the Project within the performance criteria, program, cost, and quality as specified in this RFT document and supporting attachments.
- d. Maintain quality control for the implementation of the designs during construction, and to that end they will be required to fully participate in a system of regular and progressive certification of the quality of the work carried out.
- e. Is to deliver the works in compliance with Australian Building Codes and standards, as well as consider corresponding any particular local codes and standards. Where compliance with Australian requirements is not possible, the Contractor is to propose, for approval by DFAT and its consultants, an alternate solution that provides comparable performance without introducing risk. Assessment and approvals of all deviation is to be documented and detailed in the Compliance Gap Analysis by the Contractor. All deviations from Australian Standards are to be reviewed and approved by the Project Manager/ Contract Administrator (PMCA) prior to implementation.
- f. Determine statutory and non-statutory authorities that need to be consulted, and the requirements of these authorities which must be incorporated. The Contractor must prepare a list of authorities the Contractor will consult with and seek approval from (complete with contacts) and must program and monitor all consultation with authorities and all authority approval processes. Any requirements identified by authorities must be submitted by the Contractor for approval by the PMCA.
- g. Develop and manage a schedule/ program the program must separately identify each location of the Works, start-up, design development, mobilisation, procurements, construction, commissioning and Defects Liability Period (DLP). The program must include a project calendar identifying working days, rostered days off (RDO's) and public holidays, the maximum major timescale unit must be weeks, task durations are to be in calendar days, each subcontractor must be identified, and all tasks are to be linked to show dependencies to other tasks.

Most important, it also must show a critical path of tasks/activities and a percent complete against each task.

1.7. Material and Product Selection

1.7.1. Considerations:

- a. The deterioration of building materials in tropical climates is more extreme and generally different to temperate climates. The main deteriorative influences in tropical climates are high temperatures, moisture, high humidity, solar radiation, insects and micro-organisms, and in marine environments, the effects of salt. Serviceability and maintenance capabilities in country must be taken into consideration in remote locations. Local specific technical training for the ongoing serviceability and maintenance must be implemented.
- b. When confirming specified or proposing alternative fixtures and fittings, the repairs, maintenance and availability of spares must also be examined. An example may be wall mounted hot water units being favoured over instantaneous hot/cold taps at sinks due to the lack of maintenance required and in country maintenance programs available.

1.7.2. Corrosive Resistance:

- a. Some materials inherently possess corrosion resistance properties whilst other materials rely on methods and treatments to be applied to them for them to be considered corrosion resistant.
- b. The atmospheric corrosivity category for the proposed project is defined in AS 4312 and the AS/NZS 2312 series as:
- c. Exterior atmospheric corrosivity category: C5-M Very High - Marine
- d. Interior atmospheric corrosivity category: C1 Dry indoors


1.8. Prevention of Mould and Mildew:

- 1.8.1. Appropriate material selection and installation to provide the most appropriate solution to combat mould and mildew as there is frequent precipitation and high air humidity typical of tropical climates producing large amounts of moisture (the main prerequisite for mould growth). The temperatures in humid climates are usually high throughout most of the year and contribute to the quick reproduction of mould spores.
- 1.8.2. Appropriate air conditioning and ventilation solution. The excessive moisture combined with the right temperatures allows for extensive mould growth. Prolonged damp conditions can lead to the colonisation of building materials and HVAC systems by moulds bacteria, wood-decaying moulds and insect pests (e.g., termites and carpenter ants). Humid indoor air may condense on the cool backside of wall linings that covers an exterior wall, providing ideal conditions for mould to grow.
- 1.8.3. Keep building materials dry during construction to prevent mould growth.
- 1.8.4. Waterproofing: Apply waterproofing membranes in wet areas to prevent water ingress. Ensure compliance with AS 3740 - Waterproofing of domestic wet areas.
- 1.8.5. Identification and Assessment: Prior to any new works being undertaken, Identify and assess the extent of mould contamination for existing conditions, including cleaning and removing mould using appropriate methods and personal protective equipment (PPE).

1.9. Engagement and Communication

- 1.9.1. In order to facilitate timely and relevant progress, the Contractor must communicate effectively with stakeholders, noting the DFAT PMCA is to be informed of all communication. In the first instance, communication will be through the on site Project Manager to inform delivery schedules, weekly 'look ahead reports' as well as issues which may affect the occupants of the site. Where there are planned or scheduled significant meetings or liaison with stakeholders (Departments representatives), the Contractor must advise the PMCA in advance, within an appropriate timeframe, so that they can arrange to attend as required. All formal presentations, and the like, must be arranged through the PMCA, and chaired and minuted by the Contractor.
- 1.9.2. Required meetings and workshops as a minimum:
- a. Monthly / Fortnightly / Weekly meetings to provide Project specific information to the DFAT, the PMCA and Contractor/s (if required) and to discuss the Project specific issues as described under the key activities. These issues will align with the PMCA and Contractor's Monthly Report.
 - b. The Contractor must prepare a weekly report and an overall monthly report with a detailed status of the project, not limited to: design, procurement, shipment update on long lead time items, construction onsite, risk, WHS reporting etc.
 - c. The Contractor must prepare for, attend and participate in meetings as directed by the PMCA.
 - d. Design meetings and workshops to focus on key design issues, program and progress, as required and gain acceptance from DFAT.
 - e. Presentations to stakeholders as required.
 - f. Commissioning and handover meetings as required.
- 1.9.3. Without the prior approval of the Contract Administrator, the Contractor must not consult directly with any Commonwealth and Host Nation stakeholders.

1.10. Project Structure

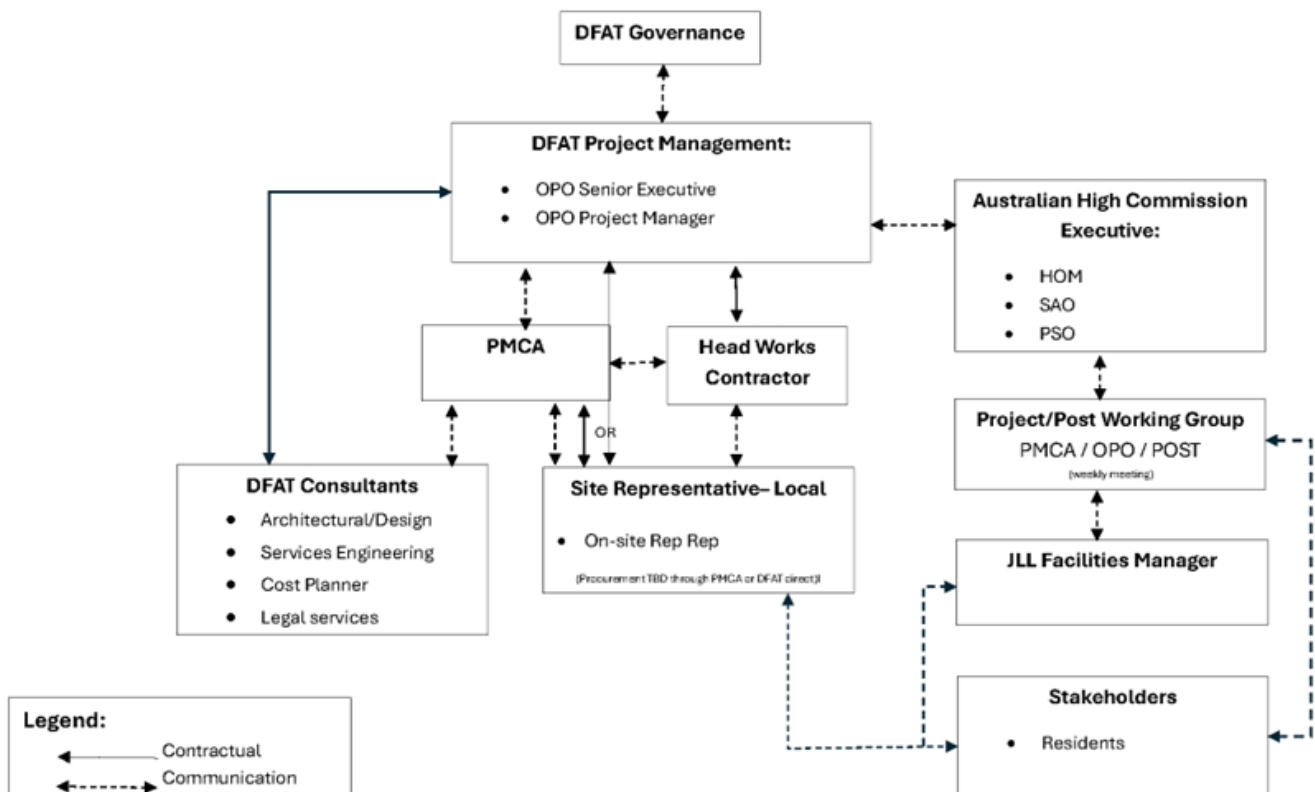

1.11. Due Diligence Services

- 1.11.1. Due to the age and disparate condition of the buildings at Konedobu, and the limited access to undertake extensive investigations of individual residences while still occupied, the scope of works includes a component of due diligence to ensure that individual apartment differences are captured typically around existing services.
- 1.11.2. DFAT will provide Design drawings to 90%. The contractor is responsible to undertake due diligence review to uplift the drawings to 100% IFC drawings and opportunities of innovation for the Contractor to incorporate.
- 1.11.3. The Contractor is to engage with DFAT throughout a due diligence stage for each of the 'stages' (for construction), the final Design should reflect and build on the 90% DFAT Design provided, and any outcomes of the due diligence phase of works highlighting and reflecting any differences.
- 1.11.4. While no significant differences are expected, the disparate nature of the maintenance and replacement of building service upgrades have resulted in differences between dwellings. For example, existing HVAC locations vary external to the buildings, proposed locations may need to be reviewed on a per dwelling basis to confirm optimal location. Power outlets and phone outlet locations vary in number and location.
- 1.11.5. The Designs is to comply with Australian codes and standards, relevant statutory, regulatory, and departmental requirements. Products specified must be able to be serviced and maintained locally.
- 1.11.6. The Contractor is required to provide the following for DFAT's approval:
 - a. Due Diligence/ Dilapidation/ Latent Condition Report.

- b. Work with the Australian High Commission security team and engage their incumbent security provider (if required) to undertake a test and commissioning report on the existing security system prior to works.
 - c. Proposed alternatives specifications and products.
 - d. Detailed Due diligence report and Documentation as required outlining any discrepancies and documentation of proposed solutions.
- 1.11.7. Design Due Diligence must be produced to a high standard to the satisfaction of the PMCA, clearly defining all construction details. Design Documentation must be 100% complete so that detailing is not left for Trade Subcontractors to resolve.
- 1.11.8. The Design Documentation must comply with the following as a minimum:
 - a. Comprehensive definition of scope in drawings, specifications and schedules not relying on any assumptions of what should be allowed for by “common industry practice” or “best practice”.
 - b. Accurate, clear and concise text notations, details and sections on drawings to assist interpretation of drawings.
 - c. Use of exploded views, erection sequence diagrams, isometric views, insets, assembly diagrams as necessary to convey complex details.
 - d. All amendments must be clouded on drawings and highlighted in schedules and specifications and cross-referenced to the notes in the amendment’s column.
- 1.11.9. **Format:** All Design Documentation, including design development and subcontract documentation, must be submitted in hard copy, in electronic formats (CAD) and in PDF format, or as otherwise required by the PMCA.
- 1.11.10. **Errors and Omissions:** The Contractor is to ensure that through design finalisation and due diligence, design co-ordination meetings and quality assurance of the design documentation are managed to ensure there are no errors or omissions within the design documentation.
- 1.11.11. **Value Management (VM):** Review design and costing if required to enable DFAT to assess how the design is tracking against the offered price. VM workshops will be facilitated by the PMCA and Cost Planner and will be conducted during the Due diligence phase.
- 1.12. Construction Services**
 - 1.12.1. The general refurbishment scope for each residence includes:
 - a. The current design, building layout and arrangement while generally fixed, the contractor should undertake an exercise of due diligence of the design against each dwelling. This includes kitchen and bathroom layouts and product specifications that will improve overall durability and longevity of the design. Design is not bespoke, but is a kit of parts (modules) that are repeatable in each residence.
 - b. Demolition of internal surfaces and fittings as required. Over the past 30 years, various works have been undertaken to each residence which are inconsistent due what could be sourced within country and the available workforce. Each house has varying floor and wall finishes, light fittings, split systems and power outlets, etc.

- c. While the properties will be handed over vacant, several elements will be required to be salvaged from the demolition. For example, ceiling fans, lights, connected appliances, AC units, pelmets, curtains. etc. Items to be salvaged and will be confirmed by DFAT for the dilapidation report.
- d. Demolition of internal surfaces, including flooring, fittings and redundant services.
- e. Removal and treatment of mouldy plasterboard walls and ceilings
- f. New wall linings, and insulation to ceilings and selected walls
- g. Supply and install new kitchens and appliances, relocate services to suit new layout and appliances.
- h. Supply and install new robes, walk in robes, while working around existing security hardware
- i. Refurbishment of wet areas (bathrooms, powder rooms, and laundries), including preparation of floors and walls, waterproofing, relocate services as required, supply and fit new tiles and fitments.
- j. Preparation of floor for new tiles throughout, noting that each residence has inconsistent floor levels (potentially to each room). Where inconsistent floor levels are present additional floor treatment/ leveling will be required to standardise design and layouts and eliminate trip hazards.
- k. Replace ceiling fans and Replacement of existing air-conditioning with new energy-efficient refrigerated air conditioning systems and new bathroom and laundry exhaust fans.
- l. Replace/add light fittings and switch plates, electrical outlets, all existing power and switch cover plates for a consistent installation.
- m. Replace/ upgrade distribution boards. This also includes electrical re-wiring if there are any non-compliance discovered with the existing installation. Inclusion of surge protection to be incorporate into switch boards.
- n. Replace solar hot water system
- o. Replace/ upgrade fire services configuration to meet code compliance
- p. Upgrade phone and data cable connection points and install a conduit for future capability upgrade from roof to living room.
- q. New stair handrails and balustrades, and refurbish the existing stair treads, providing additional fall protection to the safe haven gate.
- r. New paint throughout.
- s. Rectification of any damage to the external painted brick façade as a result of the works.
- t. New double glazing and security screens to window openings, curtains and window furniture.
- u. Exiting security system is not to be altered or touched unless in coordination and consultation with the AHC security team. The security system is to be handed back over to the AHC team at the end of the project in the same operating condition as it was in the testing and commissioning report during Due Diligence phase.

1.12.2. **Mandated Standards and Codes:**

Applicable Australian (AS) and New Zealand (NZ) Standards and Codes are to be used on this project due to their high level of stipulated requirements, and each element is to reference the appropriate standard accordingly. Ensure the finished product complies with the National Construction Code (NCC).

1.12.3. **Mechanical Systems**

- a. Refer to Attachment C
- b. Heating, Ventilation, and Air Conditioning (HVAC) to AS1668: Ensure the HVAC system is designed to provide adequate cooling for each unit. Use energy-efficient systems that are low maintenance and can be serviced and repaired in country.
- c. Ventilation: Ensure proper ventilation in all areas, including bathrooms, powder rooms, laundries, and kitchens, to maintain indoor air quality. Use exhaust fans and consider mechanical ventilation systems where natural ventilation is insufficient. For example, the Building Code of Australia (BCA) requires an airflow of at least 20 litres per second for laundries, 25 litres per second for toilets and 50 litres per second for bathrooms.
- d. Energy Efficiency: Follow the guidelines in HB 276 for energy-efficient installation of heating, cooling, and air conditioning equipment.
- e. Insulation: Properly insulate ductwork and pipes to improve energy efficiency and reduce noise.
- f. Condensate Drainage: Ensure proper drainage of condensate to prevent water damage. The material used for the drain must be suitable for the purpose and resistant to sunlight if exposed.
- g. Condensation: Appropriate material selection and insulation is the most appropriate solution to combat condensation. In addition to insulating ceilings, walls, and other structural elements, it's advisable to insulate the surfaces that are most prone to forming condensation as well, such as metal door frames. The use of "vapour permeable" barriers in the building envelope are required to control water permeability. Selection of the vapour barrier is critical to maintain drier conditions, prevent risks associated with condensation, and reduces moisture and mould related issues.
- h. Outdoor Unit Placement: Securely fix outdoor units and consider their placement to avoid noise issues and ensure efficient operation.
- i. Ensure any service penetration of the external walls connecting condensers is adequately sealed where transitioning through the external envelope.
- j. Noise Levels: Ensure the installation of both indoor and external units complies with local noise regulations to minimise disturbance to residents and neighbours.

1.12.4. **Electrical Systems**

- a. Refer to Attachment C
- b. Wiring and Circuitry: Use high-quality wiring that complies with AS/NZS 3000. Ensure circuits are appropriately rated for the load they will carry.

- c. Lighting: Design to AS/NZS 1158:1. Install energy-efficient lighting, such as LED fixtures, and ensure adequate lighting in all areas. Use moisture-resistant fixtures in wet areas like bathrooms etc.
- d. Safety Features: Include safety features like Residual Current Devices (RCDs) and surge protectors. Ensure all electrical installations comply with AS/NZ safety regulations.

1.12.5. **Plumbing Systems**

- a. Refer to Attachment C
- b. Water Supply: Ensure a reliable and efficient water supply system, including hot and cold-water services. Use materials that comply with AS/NZS 3500.
- c. Sanitary Plumbing: Install sanitary plumbing systems that efficiently handle waste and prevent blockages. Ensure compliance with the Plumbing Code of Australia (PCA) 5.
- d. Drainage: install effective wastewater drainage systems to prevent flooding and water damage. Ensure proper grading, location and installation of drains.
- e. Water Efficiency: Use water-efficient fixtures and fittings to reduce water consumption and comply with sustainability standards.
- f. Replace solar hot water system

1.12.6. For Architectural and Interior components, refer to Attachment C –Architectural drawings Finishes Schedule, Attachment C – Fittings, Fixtures and Equipment Schedule, and Attachment C – General Specification

1.12.7. The Contractor is to allow for provision of a separate office for the Superintendent's onsite Project/Site Manager office to include for a Desk, Chair, meeting room, AC power, data, storage cabinets etc for the duration of the works.

1.12.8. All materials are to be sourced and supplied by the contractor. DFAT will require the contractor to provide a Detailed Procurement Plan as part of their tender response. Consider the ESD properties of materials and equipment sourced and utilised in the execution of the fit-out. Solutions should consider the total lifecycle approach, including sustainable design and energy efficiency, reducing the environmental impact during construction, and minimising and simplifying enduring maintenance of the output facilities. The ESD process is to pay particular attention to the location, the climatic conditions, and the site and its associated constraints.

1.12.9. The Contractor may be required to provide the following services in order to complete the Works as outlined in the RFT. These services may include, but are not limited to:

- a. Provide all labour, materials, plant and equipment.
- b. Supplement and enhance all equipment and accessories as well as provide competent labour for installation, operation and dismantling.
- c. Subcontract necessary services and trades.
- d. Progress claim valuation and requests.
- e. Progress reporting.
- f. Sub-contractor or trade contractor variation reviews, valuation and recommendations.

- g. Provide protection to the building services and finishes (outside any construction site (s) manage by the Contractor) and undertake repairs and makegood of any damage caused by the Contractor (and its subcontractors).
- h. Co-operation and co-ordination with Post, other occupants and local authorities as required to deliver the works.
- i. Co-operation and co-ordination with other contractors and consultants of the Department.
- j. Trade management and coordination.
- k. Determine delivery methods of subcontracts or trade contracts.
- l. Ordering of materials, goods, and loose furniture.
- m. Cost and schedule management and programming.
- n. Inspection documents and certifications.
- o. Site evaluation and administration, work letters, and permits.
- p. Obtaining and complying with regulatory approvals.
- q. Engineering, Procurement, Construction and Project Management (EPCM).
- r. Independent commissioning services.
- s. Maintenance management and execution.
- t. Supply chain management.
- u. Site management and inductions, management of Work Health and Safety.
- v. Maintain a secure, clean and safe site during all Works, final site clean-up and restoration of any surrounding site areas following completion.
- w. Quality management and testing.
- x. Decommissioning.
- y. Defects inspections and reports.
- z. Rectification of defects.
- aa. Transfer of warranties to DFAT.
- bb. Preparation and provision of as-built drawings and operation and maintenance manuals.
- cc. Work with the Australian High Commission security team and engage the incumbent security provider (if required) to undertake a test and commissioning report on the existing security system prior to PC to confirm Security system is operational and in same condition as when handed to the Contractor.

1.12.10. **Work Health and Safety (WHS):**

- a. WHS of all personnel is of primary concern at all times. The design and construction of the works must provide the end user with a working environment in conformity with all relevant statutory requirements and guidelines.
- b. The DFAT WHS Policy requires the Contractor to undertake the following:
 - i. Australian-based contracted organisations have legislated duties stipulated in the relevant Australian State or Territory WHS legislation. However, overseas contracted organisations may have their own form of WHS legislation.
 - ii. The Contractor must:
 - Comply with relevant WHS legislation and contract requirements.
 - Develop and implement their WHS systems to protect their workers and other persons from injury and/or illness as a result of the work.
 - Appropriately manage health and safety risks by cooperating and coordinating activities to eliminate or minimise those risks.
 - Provide their workers with information, instruction, training and supervision relevant to the work.
 - Inform the department when a worker loses a competency, certificate or licence.
 - Notify the Commonwealth Representative, onsite Project/Site Manager and the Contract Administrator immediately of all WHS incidents and undertake an investigation.
 - Notify the relevant local health and safety regulator of notifiable incidents.
 - Effectively communicate and consult with their workers and the department throughout the life of the contract.
 - Provide the department with a WHS assurance report in accordance with the contract.
 - carry out the Contractor's Activities safely and in a manner that does not put the health and safety of persons at risk;
 - carry out the Contractor's Activities in a manner that protects property; and
 - comply with any direction issued by the Contract Administrator to change its manner of working or to cease working if the Contract Administrator reasonably considers there is a risk to the health and safety of people or damage to property arising from the Contractor's Activities;
 - iii. The contracted organisation will implement these requirements through the implementation of the contract and documented in the WHS Plan.
 - iv. Should a notifiable incident occur onsite the contractor must;
 - immediately provide the Contract Administrator with a copy of the notice required to be provided to the relevant Commonwealth, or Host Nation regulator;

- promptly provide the Contract Administrator with a copy of all witness statements and the investigation report relating to the notifiable incident;
- promptly provide the Contract Administrator with copies of any notice(s) or other documentation issued by the relevant Commonwealth, Australian State or Territory regulator or Host Nation regulator; and
- within 10 days of the date of notification to the relevant Commonwealth, Australian State or Territory regulator or Host Nation regulator, provide the Contract Administrator with a summary of the related investigations, actions to be taken and any impact on the Contract that may result from the notifiable incident;

1.12.11. **Safe Work Method Statement (SWMS):**

- a. In addition to any requirement under the Contractor's WHS Plan, if DFAT considers an activity to be High Risk, the Contractor undertaking the activity must provide, in writing, to the DFAT a detailed description of the Work, a detailed assessment of the risks, and the specific arrangements and methods which the Contractor proposes to adopt for the execution of the Work (Safe Work Method Statement or similar). Such risks may involve, but not be limited to, risks to the environment, health, safety, damage to property or any existing installations or services. The Contractor must then comply with the approved SWMS.
- b. Without limiting the Conditions of Contract or the Special Conditions, all Asbestos that is to be removed from Site must be in accordance with:
 - i. All applicable Statutory Requirements, including WHS Legislation.
 - ii. All relevant DFAT policy.
 - iii. The Code of Practice for the Management and Control of Asbestos;
 - iv. The Worksafe Australia Asbestos Code of Practice: The Safe Removal of Asbestos.
 - v. The Guide to the Control of Asbestos Hazards in Buildings and Structures; and
 - vi. The Guidance Note on the Membrane Filter Method for Estimating Airborne Asbestos Dust.

1.12.12. **Request for Information (RFI)**

- a. Without limiting the Conditions of Contract, when submitting any RFI the Contractor must clearly state that the Contractor has reviewed all available documentation to address the issue directly before submitting the RFI and must include:
 - i. A detailed description of the issue for which the RFI is being made.
 - ii. References to all applicable documentation.
 - iii. All sketches and/or photographs outlining the issue (if applicable).
 - iv. The initial request for information from the subcontractor (if applicable).
 - v. All relevant drawings, specifications references pertaining to the issue (if applicable).
 - vi. Any other applicable information available to the Contractor.

- vii. All RFIs must also include, wherever possible design proposals or options developed by the Contractor for resolving the issue. The Contractor must endorse all RFIs before submission.

1.12.13. **Approvals**

- a. The Contractor is deemed to have allowed in the Contract price and in its Program for the submission to the Project/Site Manager of all necessary and required samples, prototypes and workshop drawings, and for reasonable time necessary for the Project/Site Manager to assess and respond, having regard to the extent, complexity and nature of the items submitted for approval. The Contractor must submit further samples, and additional or amended information as may be directed by the Project/Site Manager.
- b. The Contractor shall also be deemed to have allowed for the provision of any further information that the Project/Site Manager may reasonably request in order to assess submissions, and for resubmission where applicable of those items not approved, including any amendments to workshop drawings. The Contractor will be deemed to have allowed for all these circumstances in its Contract Price and in its program.
- c. The Contractor is not permitted to commence work affected by samples, prototypes or the works identified by workshop drawings until they have been approved by the Project/Site Manager. Approval by the Project/Site Manager does not affect the responsibilities of the Contractor under the Contract.
- d. Approval by the Project/Site Manager does not affect the responsibilities of the Contractor under the Contract.

1.12.14. **Samples, Prototypes and Shop Drawings:**

The Contractor is to provide samples as requested by the PMCA and design consultants with all shop drawings for review approval by PMCA and Design Consultants. No works are to begin until all shop drawings have been received and reviewed by the PMCA. Upon receiving written confirmation and comments from the PMCA of the received shop drawings works can then begin.

1.12.15. **Consistency:**

For the whole quantity of each material or product the Contractor must use the same manufacturer or source and provide consistent type, size, quality, and appearance.

1.12.16. **Product Guarantees:**

The Contractor shall obtain for the benefit of Commonwealth Government of Australia, product guarantees, warranties and the like where these are available from the manufacturers, suppliers and/or sub-contractors. Such guarantees and warranties should be included in the operational and maintenance manual for said product.

1.13. **Works-As-Executed or As-Built Drawings:**

- 1.13.1. The Contractor shall provide Works As-Executed (As-Built) and as installed drawings in English at the completion of each stage at handover, which will need to be an accurate record of the work performed by the Contractor or its sub-contractors for the entirety of the Works including shop drawings. These drawings are to be true reflection of the as built delivered, and not a rebadging of the design drawing exercise.

- 1.13.2. Further to the particular requirements of the Technical Specifications and the requirements of the General Conditions of Contract, the Contractor must show the 'as installed' locations of building elements, concealed services, plant and equipment, co-ordinate dimensions where applicable and supply all notes and descriptions necessary for a complete record, including all Variation referencing.
- 1.13.3. All "Works As Executed' drawings" shall also be prepared using computer aided drafting AutoCAD system.
- 1.13.4. The Contractor shall supply completed Works-As-Executed drawings to the Australian Project/Site Manager for review and comment and make corrections and update as-built documentation and resubmit as may be required. These drawings must be signed as, "Approved" by the Project/Site Manager.
- 1.13.5. All Works As Executed computer drawings will be compiled and saved and submitted in CAD (e-transmitted with all attachments layouts and plot styles attached) and PDF formats, labelled and dated accordingly.
- 1.13.6. On completion and after approval, issue to the Project/Site Manager two copies of the Work-As-Executed drawings via electronic (email/share drive), together with two complete sets of hard copy drawings at A3 size.
- 1.14. Handover - Operation and Maintenance Manuals (O&M Manuals):**
- 1.14.1. The Contractor must fully co-operate with the Contract Administrator, the Commonwealth and relevant Host Nation agencies or authorities, and otherwise to take all steps necessary to ensure the timely, efficient and comprehensive and smooth:
- a. Commissioning of the Works or each Stage.
 - b. Handover of the Works or each Stage to its intended occupants.
 - c. Occupation, use, operation and maintenance of the Works or each Stage by its intended occupants.
- 1.14.2. Without limiting paragraph (5.14.1), the Contractor shall also:
- a. Comply with its Commissioning Training and Handover Plan.
 - b. Witnessed Commissioning certificates for services including but not limited to fire systems, plumbing, electrical.
 - c. Arrange and coordinate with post for recommissioning and testing of the security system to ensure no damage has occurred during works and it is still functioning as per its condition at initial site handover.
 - d. As and when required by the Contract Administrator, provide the Commonwealth and such persons from the Host Nation or otherwise as notified by the Contract Administrator, with such other specific assistance as may be required by the Contract Administrator to facilitate the commissioning, training handover and other activities set out in paragraph (a), including providing the occupants and Other Contractors with any training required to operate and maintain the Works or the Stage.
 - e. As a condition precedent to Completion, hand to the Contract Administrator or other persons nominated by the Contract Administrator all Project Documents which are required for the use, operation and maintenance of the Works or the relevant Stage.

- f. As and when reasonably required by the Contract Administrator, meet with the Contract Administrator and such other persons as are nominated by the Contract Administrator (including from the Host Nation and any Other Contractors) with a view to ensuring that the Commonwealth and the nominated persons have sufficient information to enable the Commonwealth or the nominated persons to:
 - i. operate the Works;
 - ii. maintain the Works; or
 - iii. perform such other activities as may be required by the Commonwealth in respect of the Works.
- 1.14.3. The Contractor shall submit for acceptance, at the time of issue of any technical submittal, the accompanying manufacturer's literature detailing the maintenance requirements. The Contractor shall collect such information during the project to achieve a progressive build-up of the completed O&M Manual. The Contractor shall provide the O&M Manuals digitally until accepted and then in hard copy to be sent to the DFAT Project Manager.
- 1.14.4. The Contractor is responsible for the preparation, coordination and compilation of the Operation and Maintenance Manuals (O&M), in accordance with the requirements of the Specifications. The Contractor is required to prepare the number of copies of the manual as listed within the Technical Schedules and as listed but not limited to the following items listed within the Schedule.
- 1.14.5. At a minimum there should be manuals associated with the following areas where applicable. As a minimum there should be manuals associated with the following areas where applicable:
- a. General items & fit out/equipment (e.g. partitions, blinds etc);
 - b. Mechanical installation/equipment;
 - c. Electrical installation/equipment spares;
 - d. Proprietary equipment items (including spares identification, etc);
 - e. Floor, wall, ceiling finishes – maintenance, cleaning and polishing; paint details and
 - f. Furniture - adjustments and spares.
- 1.14.6. The Format of the O&M Manuals:
- The format of the O&M manuals in 2 No. paper copies and 1 No. electronic copies and as a minimum shall include the following:
- a. A4 Size loose leaf commercial quality 4 ring hard cover binders, each indexed, divided and titled.
 - b. Covers shall identify each individual binder with typed or printed title "OPERATION AND MAINTENANCE MANUAL - ENGLISH VERSION" to spine and front cover, each also identifying the title of the project, the volume number, the volume subject matter, and date of issue.
 - c. Ring size: 50 mm maximum, with compressor bars.
 - d. Text: Include all necessary manufacturers original quality printed data, associated diagrams.

- e. The content shall be typewritten or printed material, handwritten materials will not be acceptable.
- f. The paper and format shall be single-sided on bond paper, in clear concise English. Number pages consecutively, unless printed material is double sided.
- g. Dividers shall be durable divider for each separate element, with typed description of system and major equipment components. Clearly print short titles under laminated plastic tabs.
- h. Drawings: Fold A3 or larger drawings to A4 size, or print larger drawings at A4 size where they are legible and accommodate them in the binders so that they may be unfolded without being detached from the rings. Provide with reinforced punched binder tabs.

1.1.1. The manuals shall include the following:

- a. Table of contents: Title as cover.
- b. Names, addresses, and telephone and facsimile numbers of consultant, sub-consultants, contractor, subcontractors and names of responsible parties; and
- c. Full particulars of Maintenance Requirements.
- d. Equipment descriptions shall include:
 - i. name, address and telephone and facsimile numbers of the manufacturer and supplier of items of equipment installed together with catalogue list numbers;
 - ii. schedules of equipment, stating locations, duties, performance figures and dates of manufacture. Model and serial numbers Provide a unique code number cross-referenced to the record and diagrammatic drawings and schedules, including spare parts schedule, for each item of equipment installed; Unique code to be clearly located in label form on the corresponding equipment (asset number)
 - iii. integrated Operation procedures: Manufacturer's technical literature as appropriate;
 - iv. integrated Maintenance procedures: Manufacturers technical literature as appropriate. Register with manufacturer as necessary. Retain copies delivered with equipment;
 - v. detailed recommendations for preventative maintenance frequency and procedures;
 - vi. safe trouble-shooting, disassembly, repair and reassembly, cleaning, and alignment and adjustment procedures. Provide logical sequence of instructions for each procedure; and
 - vii. schedule of spares recommended to be held on site along with one set of spares, being those items subject to wear or deterioration and which may involve the Employer in extended deliveries when replacements are required. Include complete nomenclature and model numbers, and local sources of supply.
- i. Certificates: Copies of suppliers warranties (or guarantees), Copies of manufacturers warranties, Copies of Certificates from authorities, Product certification, warranties to be held in the Commonwealth Governments.

- j. Drawings: Work-as-executed drawings, full size; and format: Use the same borders and title block as the contract drawings. The Architect may supply transparencies of the contract drawings as the basis for work-as-executed drawings.
- 1.14.7. The operation and maintenance manuals shall include details of supplier's warranties, and spare parts list of machinery and equipment supplied and installed by the Contractor.
- 1.14.8. A first draft for approval shall be submitted four (4) weeks prior to the anticipated Practical Completion date. All operation and maintenance manuals shall be similarly bound when finalised and be in the English language (at a minimum).
- 1.14.9. A section for the subsequent attachment of the Services and Maintenance Records schedule that will identify all the maintenance activity undertaken by the Contractor during the Defects Notification Period and include a schedule of preventative and regular recommended maintenance.
- 1.14.10. The Contractor shall provide a digital copy of the following details as appropriate to the Plant and Materials installed, ensuring that all references to literature and technical data statements are specific to the item concerned:
- 1.14.11. The O&M manual will be provided at handover of each stage of the project.
- 1.15. Defects Liability Period:**
 - 1.15.1. Each stage will have a period of 12 months after date of Practical completion for that stage of works.
 - 1.15.2. The contractor is responsible for all preventative maintenance for the first 12 months during the DLP inline with manufacturers specifications and maintenance requirements.
 - 1.15.3. The Contractor must ensure that during the Defects Liability Period for the Works or each Stage such planned and unplanned maintenance is carried out:
 - a. As required by the Works Description.
 - b. As is otherwise necessary to ensure that the Works are, or each Stage is, throughout and at the end of the Defects Liability Period in a condition fit for their intended purpose.
 - c. Without limiting paragraphs (a) and (b), in accordance with the Commissioning Training and Handover Plan.
- 1.16. Qualifications, Credentials and Accreditation:**
 - 1.16.1. The Contractor must ensure that its personnel hold any required professional, para-professional, trade, semiskilled or other relevant qualifications, credentials and accreditation appropriate to the provision of the services for which they are responsible for the duration of the Contract.
- 1.17. Privacy and Confidentiality:**
 - 1.17.1. During the term of the agreement, the Contractor may have access to private and confidential information relating to the operations of the Commonwealth or its personnel. The Contractor must ensure that any confidential or personal information is treated as private and confidential at all times. Such information is not to be divulged to any person without the prior written agreement of the Commonwealth.

1.18. Required Standards of Performance**1.18.1. Industry and Legislative Requirements**

- a. The Services must be carried out in accordance with the industry standards as stipulated by Local Authority.
- b. Performance in accordance with these industry standards must be to the satisfaction of the DFAT or relevant Commonwealth Entity and Commonwealth, State, local government and international legislative requirements. The Contractor is expected to conduct all of the Services in a manner that enhances the overall quality and performance of the activities with which the Services are associated.

1.19. Regulatory Requirements

- 1.19.1. The provision of the Services may require the Contractor to observe various Australian and international regulatory or legislative requirements. These may include privacy, security, hygiene, environmental, energy and resource usage, industrial, quarantine, heritage and work, health safety requirements and extend to such considerations as processing, handling, storing, using, and transporting various materials and substances. The Contractor must strictly observe such requirements and meet any associated business registration and licensing at their own cost. The PMCA or Project superintendent may require the Contractor to submit evidence confirming the satisfaction of these requirements both prior to the commencement of the Contract and during the course of the agreement.

1.20. Conditions Applying to the Delivery of the Services**1.20.1. Co-Ordination**

- a. The Contractor is required to participate in formal coordination meetings as they apply to the delivery of the required services and the meeting of the associated contractual obligations. The Contractor's attendance at the meetings will be at no additional cost to DFAT.

1.20.2. Uplift and Delivery

- a. The Services are to be undertaken by the Contractor with the appropriate number of staff to be determined by the Contractor and noting requirements in clause 5.14.2, in a professional manner, to ensure completion within the agreed timeframes. Appropriate timeframes will be established based on the volume of Household Goods to be removed/stored.

1.20.3. Contractor Personnel

- a. The Contractor will be responsible for providing all personnel necessary for the proper conduct of the Services. All personnel utilised by the Contractor to perform the services are to be registered and licensed as required for the conduct of the particular service. The Contractor is to provide sufficient personnel to complete the Services within the timeframes agreed with the Commonwealth.

1.20.4. Problem Resolution Procedures

- a. The Contractor must establish problem resolution procedures that, among other matters, provide for unresolved problems to be notified and escalated to the Contractor's Escalation Representative as soon as possible, or

- b. Otherwise within 3 business days or other period of time notified by DFAT. As a minimum, these procedures are to provide a statement that specifies:
 - i. the remedial action that would be proposed when a problem occurs;
 - ii. the elapsed time for rectification;
 - iii. how the problem would be escalated to rectification point;
 - iv. what the escalation rectification points are from user to management; and
 - v. the elapsed time for moving to the next higher rectification point.
- c. The problem resolution procedures established by the Contractor are separate to the agreed dispute resolution procedures set out in the draft contract.

1.21. Security Requirements

1.21.1. The Contractor must comply with:

- a. The Commonwealth Protective Security Policy.
- b. Any directions issued by DFAT in relation to security.

1.21.2. Overseas Security

- a. The Services are required in some countries that may pose a higher security risk to both Contractor Personnel and DFAT staff. The Contractor must agree to take steps to ensure that these risks are minimised and that local subcontractors and their staff are engaged using sound commercial practices.

